

→ W.NR.:	1.2714 (EN ISO 4957)
→ EN / DIN:	55NiCrMoV7
→ AISI:	~ L6

→ CHEMICAL COMPOSITION (W%)

C	Si	Mn	Cr	Mo	Ni	V
0.55	0.25	0.75	1.10	0.45	1.65	0.10

→ DELIVERY CONDITION: quenched and tempered at 340-400 HB

→ PROCESS: conventional

→ HEAT TREATMENT

soft annealing	cooling	hardness (HB)
650-700 °C	furnace	<248
hardening	quenching	hardness (HRC)
830-870 °C (oil), 870-900 °C (air)	air, oil, 450-550 °C	56-58

→ PROPERTIES

Excellent toughness and hardenability. Good resistance to wear in hot applications. Can be water-cooled.


→ APPLICATION

The steel is resistant to high shock loads. For very large dies for forging, stamps head, etc. For the frames of tools used in drop forging. Supporting parts used in extrusion (amplifiers, hammers). Moulds for plastics. Can also be used for various punches, scissors. Working hardness of up to max. 54 HRC.


→ ULTRASOUND EXAMINATION

EN 10228-3 art.2-4

tt

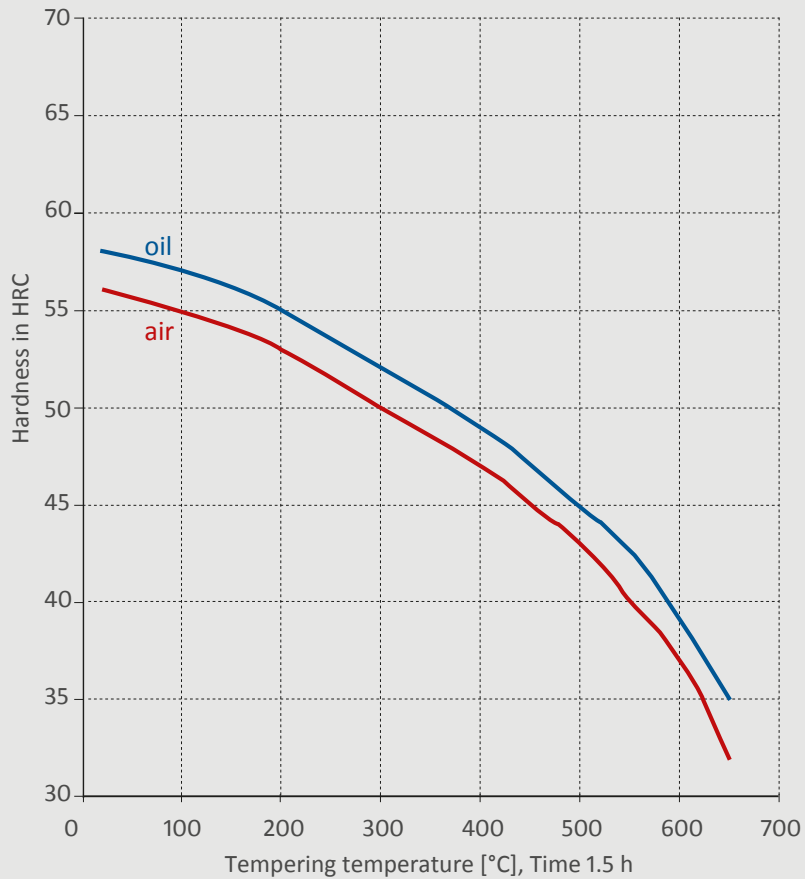

cct

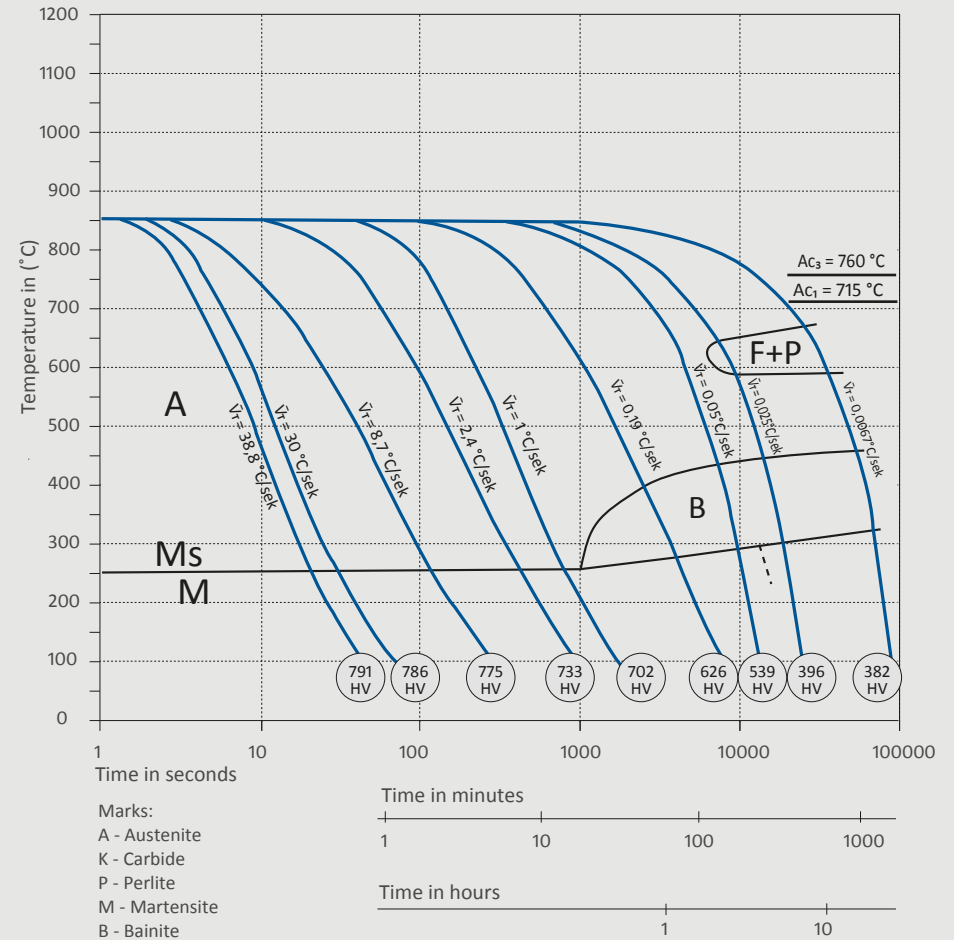

DISCLAIMER
 The information and data presented herein are typical or average values and are not a guarantee of maximum or minimum values. Applications specifically suggested for material described herein are made solely for the purpose of illustration to enable the reader to make his own evaluation and are not intended as warranties, either express or implied, of fitness for these or other purposes. There is no representation that the recipient of this literature will receive updated editions as the become available.